

200W AC LED Flood Light



Product Feature

- AC Integrated Driver, High Reliability, PF>0.98
- With OVP, OTP and OCP Protection
- 6KV -10KV Surge Protection(External SPD)
- LED SMD3030, CRI>80
- Can pass CE, RoHS,FCC,SAA,RCM Certification
- CCT:3000K,4000K,6000K Options
- Long life:30,000 hrs,3 years warranty
- 60° /70*120° beam angle (with lens)
- High efficiency, High Lumen LUX
- No UV or Infrared Radiation

Description


Light Source:	SMD 3030 64pcs /4 Modules		
Rated Power(W):	200W±5% @230VAC		
Input Voltage(V):	200-265VAC		
PF:	0.98		
Led Driver:	AC linear		
Surge Protection:	6KV -10KV Surge Protection(External SPD)		
Lumious(lm):	105lm/W±5%		
CCT(K):	WW 3000K	NW 4000K	CW 6000K
CRI:	>80		
Beam Angle:	60° / 70*120°		
Material:	Aluminum +PC Diffusion Cover		
Lifespan(H)	>30,000		
Operation Temp.	-33℃-55℃		
Weight	3.7kg		
Dimension(mm):	300*415*200/590*220*80mm		

Product Application


Storage Lighting, Industrial Lighting, Architectural Lighting, Landscape Lighting, Store Lighting, Stadium Lighting, Tunnel lighting and so on




Lens Dimension

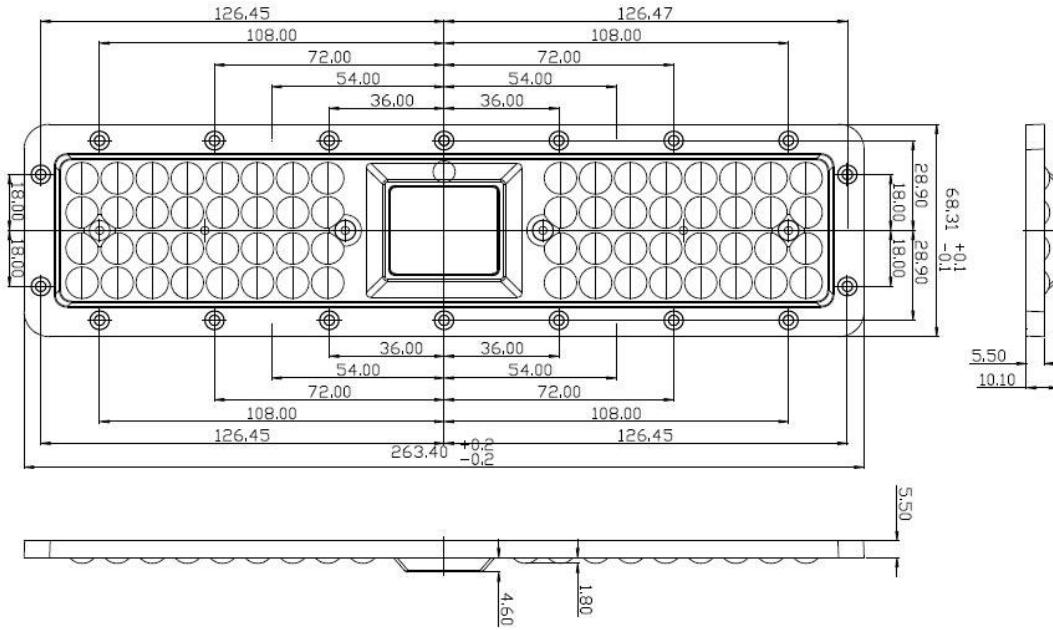


PCB Dimension

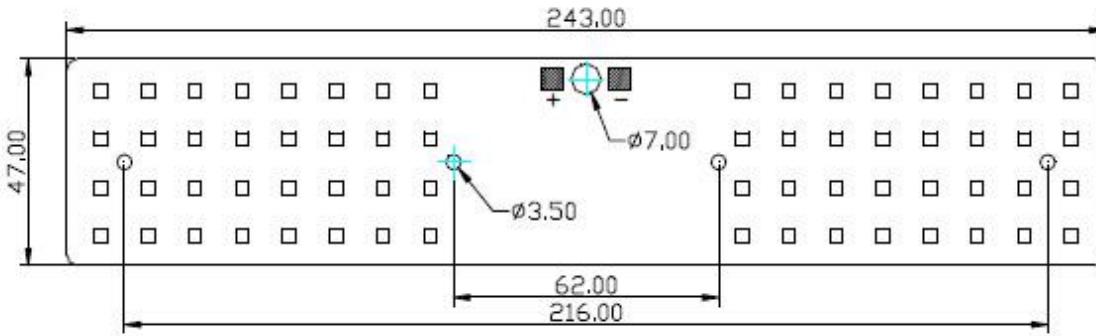

Heat sink (non-adjustable) Dimension

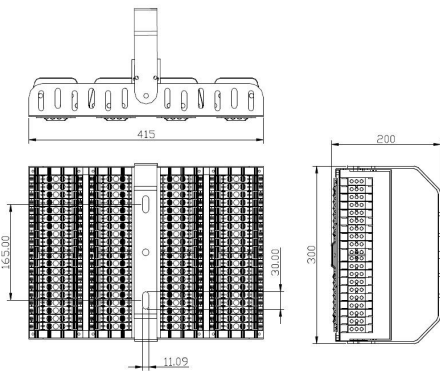

Heat sink (adjustable) Dimension

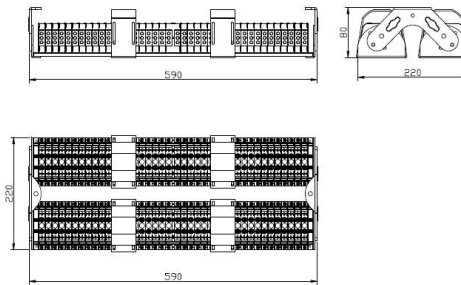

Heat sink (linear type) Dimension

Please enlarge picture for details !

PCB Light Board



60 Degree Lens Cover



纯铝散热套件

