



Round Recessed Downlight

Product Features

- 1- Modern Design
- 2- Quality Aluminium Thermal Body
- 3- High Brightness
- 4- Easy Installation
- 5- Environmental Friendly
- 6- Low Maintenance



Product Applications

For indoor use only.
Homes, Offices, Malls, Hotels, Hospitals, Lobbies,

*** This Emittron Product Match with conventional Emergency Pack.**

Optical Characteristics


Part No	Colour Temp(K)	Light Source	Flux (lm)	CRI	Beam Angel
EMDL-04-12Wxx	3000~6000	LED : EPISTAR Chip	1000	75-80	150°∠
EMDL-06-12Wxx	3000~6000	LED : EPISTAR Chip	1000	75-80	150°∠
EMDL-06-15Wxx	3000~6000	LED : EPISTAR Chip	1300	75-80	150°∠
EMDL-08-22Wxx	3000~6000	LED : EPISTAR Chip	1800	75-80	150°∠

Electrical Characteristics

Dimmable

Part No	Rated Power	Input Voltage	Frequency	Power Factor
EMDL-04-12Wxx	12 W	220~240VAC	50-60Hz	> 0.95
EMDL-06-12Wxx	12 W	220~240VAC	50-60Hz	> 0.95
EMDL-06-15Wxx	15 W	220~240VAC	50-60Hz	> 0.95
EMDL-08-22Wxx	22 W	220~240VAC	50-60Hz	> 0.95


Products Ordering System

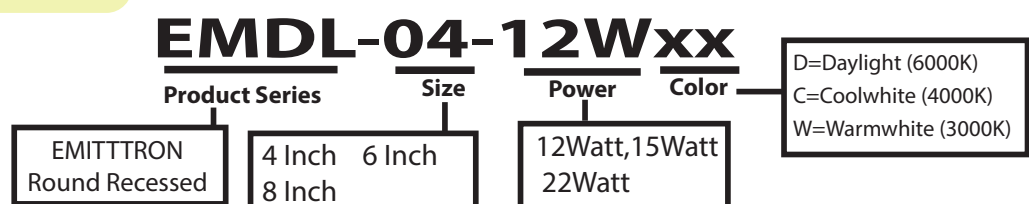



Round Recessed Downlight

Lux Diagram

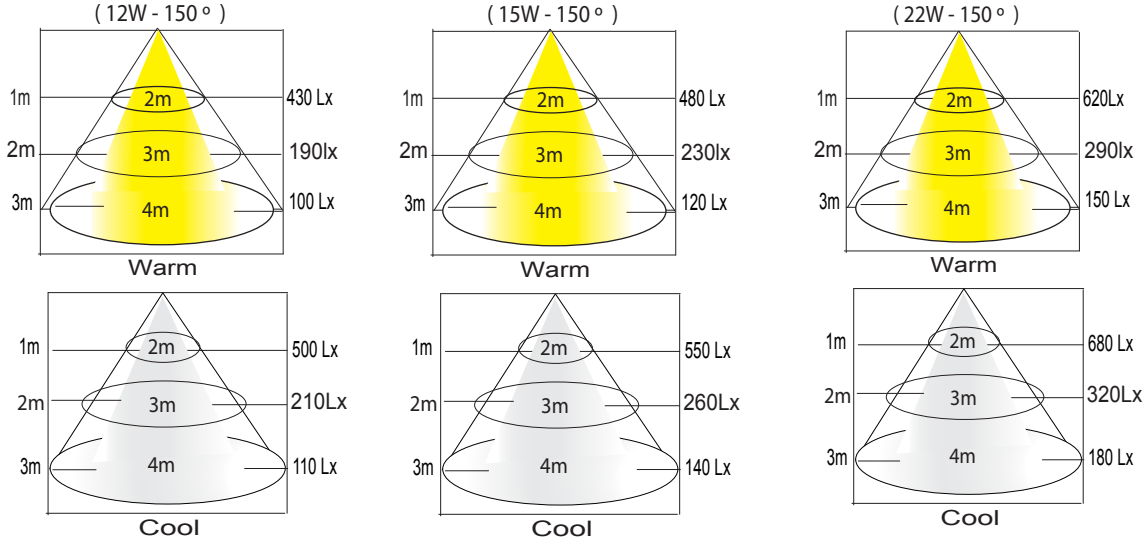

Materials

Housing	Coated Aluminium
Optics	Polycarbonate Diffuser
Color	White




Front View




Back View



Dimensions

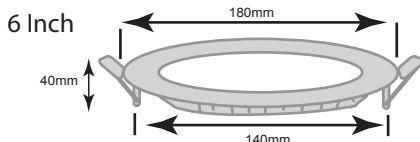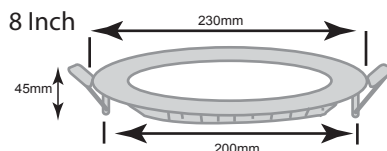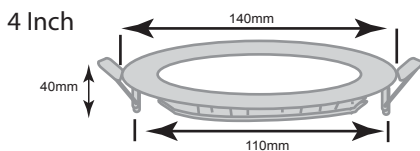

Cutting Hole Size



- 4 Inch=115mm + - 3mm
- 6 Inch=150mm + - 3mm
- 8 Inch=210mm + - 3mm